


DATE	PROJECT	FIRM	TYPE
------	---------	------	------

- FEATURES :
- MODULAR OPTICS IN 15/20/25/35/45 DEGREES
 - UP TO 10,000+ CBCP AT 3000K
 - ADJUSTABLE FROM BELOW THE CEILING FOR EASY AIMING
 - WORKS WITH BOTH 0-10V AND ELV DIMMING RIGHT OUT OF THE BOX
 - FIELD REPLACEABLE LIGHT ENGINE INSTALLS QUICKLY AND EASILY WITHOUT TOOLS

ERIA with Round Open Trim
JMA - RT



ERIA NEW CONSTRUCTION HOUSING
JMA - RH

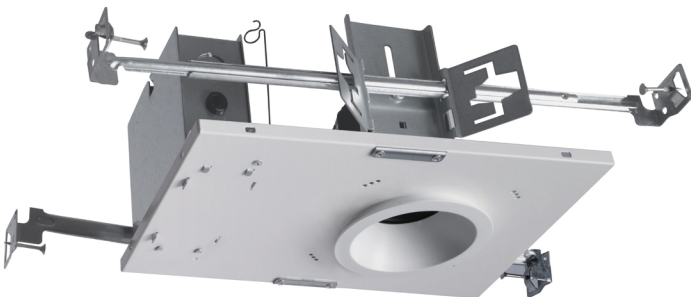

ERIA REMODEL HOUSING
JMA - RH - RMDL



ECOSENSE LIGHTING INC.
837 NORTH SPRING STREET
SUITE 103
LOS ANGELES, CA 90012

P • 310.496.6255
F • 310.496.6256
T • 855.632.6736
855.6.ECOSEN

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
VISIT [ECOSENSELIGHTING.COM](https://www.ecosenselighting.com) FOR THE MOST CURRENT SPECIFICATIONS.
FOR A LIST OF PATENTS VISIT [ECOSENSELIGHTING.COM/IP-PORTFOLIO/](https://www.ecosenselighting.com/ip-portfolio/)
©2019 ECOSENSE LIGHTING INC. ALL RIGHTS RESERVED. ECOSENSE, THE
ECOSENSE LOGO, TRSV, TROV AND ECOSPEC ARE REGISTERED TRADEMARKS
OF ECOSENSE LIGHTING INC.
RISE™, SLIM COVE™, FREEDOM TO CREATE™, MACRO™, FLIP-TO-FLAT™ ARE
TRADEMARKS OF ECOSENSE LIGHTING INC.

ECOSENSELIGHTING.COM

1/5

DATE	PROJECT	FIRM	TYPE
------	---------	------	------

ERIA with Round Slotted Trim
JMA – RT/RS


20° (OPI-JMA-20) beam angle optic
recommended pairing



ERIA with Round Angle Cut Trim
JMA – RT/WW



ERIA with Round Open Trimless
JMA – RT/TL


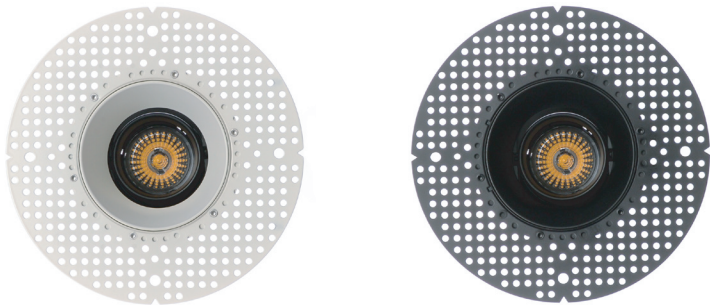


All trims available in Satin White or Satin Black Finishes



DATE	PROJECT	FIRM	TYPE																		
BINNING	2-STEP COLOR CONSISTENCY																				
COLOR TEMPERATURE	2700K* / 3000K* / 3500K / 4000K *available in >90 CRI																				
MODULAR OPTICS	INTERCHANGEABLE TOTAL INTERNAL REFLECTION (TIR) OPTIC FOR 15° / 20° / 25° / 35° / 45° BEAM ANGLE OPTIONS																				
OUTPUT AT 3000K/80CRI, OPEN TRIM	<table><tr><th>BEAM ANGLE</th><th>CBCP</th><th>DELIVERED LUMENS</th></tr><tr><td>15</td><td>10,473</td><td>1237</td></tr><tr><td>20</td><td>5988</td><td>1124</td></tr><tr><td>25</td><td>5423</td><td>1119</td></tr><tr><td>35</td><td>2585</td><td>960</td></tr><tr><td>45</td><td>1530</td><td>868</td></tr></table>			BEAM ANGLE	CBCP	DELIVERED LUMENS	15	10,473	1237	20	5988	1124	25	5423	1119	35	2585	960	45	1530	868
BEAM ANGLE	CBCP	DELIVERED LUMENS																			
15	10,473	1237																			
20	5988	1124																			
25	5423	1119																			
35	2585	960																			
45	1530	868																			
ELECTRICAL	SYSTEM WATTS																				

DATE	PROJECT	FIRM	TYPE
------	---------	------	------


ERIA NEW CONSTRUCTION HOUSING

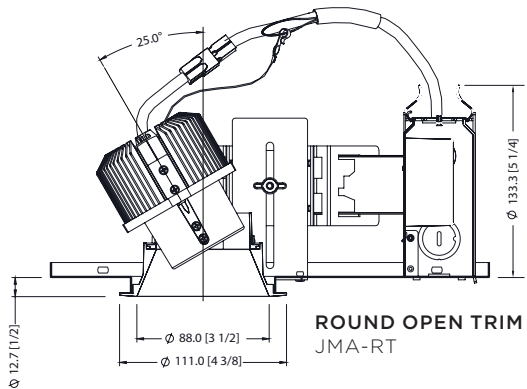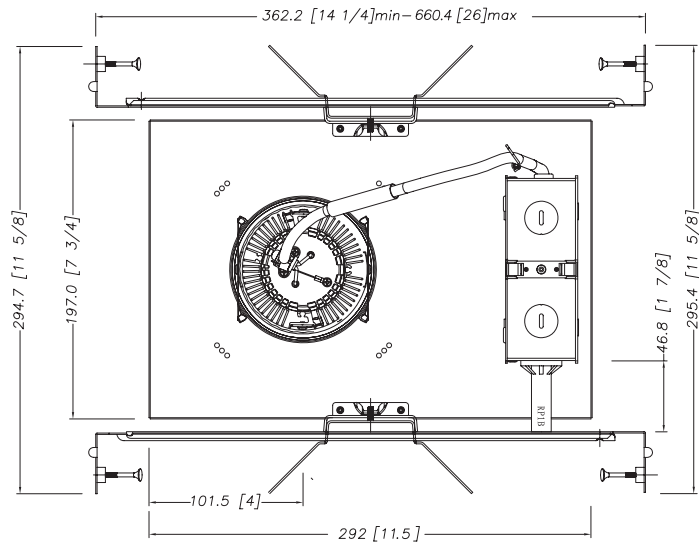


ERIA REMODEL HOUSING

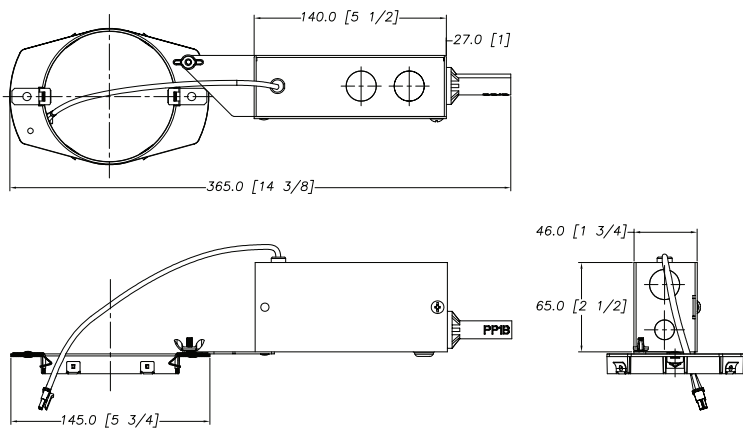

EMERGENCY PACK DIMENSIONS

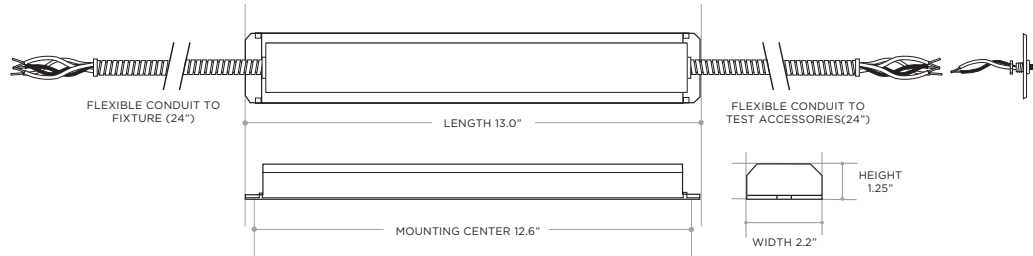

EMERGENCY PACK TGRID MOUNTING ACCESSORY (OPTIONAL)

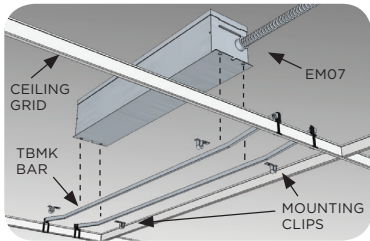

Use the TBMK mounting kit to remote mount flexed units within a grid ceiling. The EM07 is secured to the bars of the TBMK via mounting clips. The bars then mount to the T-bars of the ceiling grid. The flexible conduit of the EM07 connects to the fixture.

DATE	PROJECT	FIRM	TYPE
------	---------	------	------

ERIA ORDERING INFORMATION

Specify the following four unique items

TRIM TYPE

MODEL #	FINISH
JMA - RT - Round Open JMA - RT/TL - Round Open Trimless* JMA - RT/RS - Round Slotted JMA - RT/WW - Round Angle Cut	WH - White BK - Black
*Compatible with New Construction Housing Only	

LED MODULE

MODEL #	CCT/CRI
JMA - MOD -	27 - 2700K 27/90 - 2700K/90CRI 30 - 3000K 30/90 - 3000K/90CRI 35 - 3500K 40 - 4000K

OPTIC BEAM ANGLE

MODEL #	ANGLE
OPI - JMA -	15 - 15° 20 - 20° 25 - 25° 35 - 35° 45 - 45°

HOUSING

MODEL #	VOLTAGE
JMA - RH - New Construction JMA - RH - RMDL - Remodeler JMA - RH - EM07 - New Construction with Emergency Battery	120 - 120V 277 - 277V

EXAMPLE ORDERING

1 - TRIM TYPE:	JMA - RT - WH	2 - LED MODULE:	JMA - MOD - 30/90
3 - OPTIC BEAM ANGLE:	OPI - JMA - 15	4 - HOUSING:	JMA - RH - 120

EMERGENCY BACKUP MOUNTING OPTION

MODEL #
ACC - JMA - TBMK TBar Grid Mounting Kit